


PP176B

**MV GROUNDING STICK**

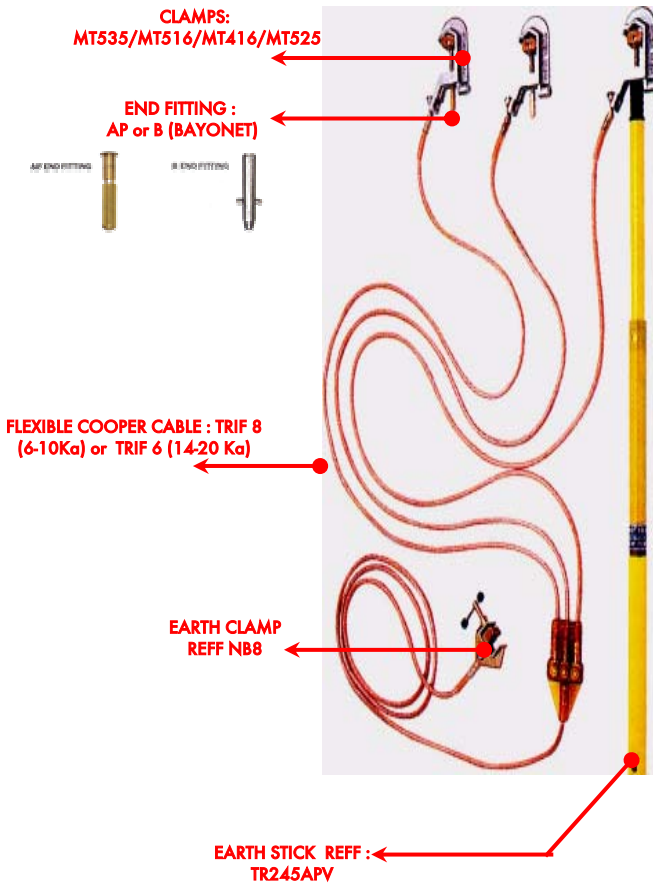

**CLAMPS TYPE :**

REFF	MT535	MT516	MT416	MT525
Dimension	44x100x180	35x79x143	35x75x169	85x56x192
Weight	0.62	0.32	0.32	0.65
Tight ening Cap. (mm)	● 5 - 35	● 5 - 16		● 5 - 30
	≡ 16 - 40	≡ 0 - 16		
	≡ 5 - 40		≡ 40 - 16	
MaxSec (kA/1S)	20	14.5	14.5	14.5
Material	Alu	Alu	Alu	Copper-Alu

ACCORDING TO SPLN 82-3 :1993

**MV No.-**

PIMT, Earthing and short circuiting for MV Substations and installation

**Earthing Sets**

**1 Set of the Clamps** of the same reference **MT 535 -MT516 - MT525 or MT 416**

**1 Set of Cooper cable** in extra flexible sheath equipped with watertight terminals and an insulated junction block,reff :

- TRIF 8 (6-10 kA)
- TRIF 6 (14-20kA)
- 3X0.75 m between clamp & junction block
- 1x2 m from junction block to earth

**1 Earth Clamp** Reff : NB8

**1 Telescopic Earth Stick** Reff TR245 APV Length : 0.85m - 1.50m

**1 metal box** reff : cm 535

**MV Clamps**

Lightweight & compact clamps, equipped with brake to prevent it turning, during fitting

- **CLAMPS MT 525**, allows to be fitted in all position up to 90 deg.
- **CLAMPS MT 535**, & **MT 516** can be used on flat bar or conductor
- **CLAMPS MT 416** is for Flat Bars

This document is S.F.E. property and cannot be copied or transmitted without written permit.

Index	012					
Date	03.02.03					Réf. Document
Author	MO					
Sibille-Fameca-Electric Co RN 7 Sud - ZI les Plaines N°17 - 26780 MALATAVERNE- FRANCE Tél. (+33) 475 905 800 / Fax (+33) 475 905 839 / e-mail : contact@sibille-fameca-electric.com						Auteur : M. O. Visé :