


## 70KV TEMPORARY GROUNDING SET FOR 3 PHASE OVERHEAD LINE SYSTEM

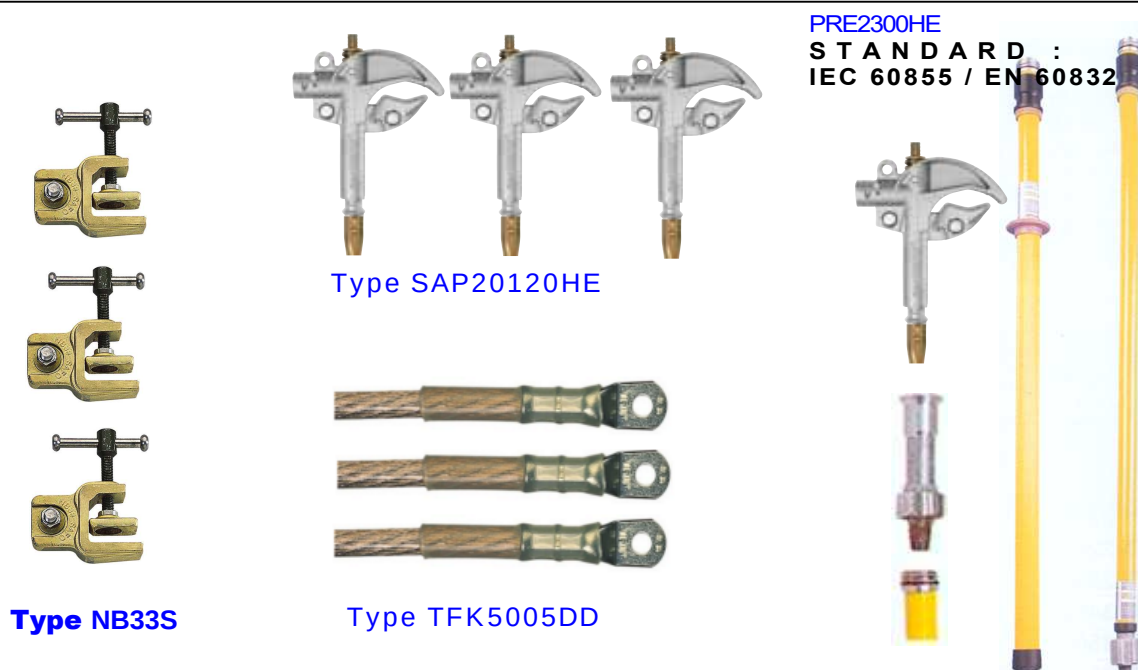

### Portable earthing set for 70 KV HV – 3 phases overhead lines

Each set includes :

3 conductor clamp ref. SAP20120HEHE for conductor diameter 20 to 120 mm  
Max. Isc : 40 kA/1s Weight : 1,6 kg

Copper earthing cables 50 mm<sup>2</sup> - length 5 meter each – ref.TFK5005DD

3 earth clamp ref.NB33S Earth clamp for flat bars Climping range : 33 mm  
Max. Isc : 40 kA/1s Length : 100 mm Weight : 1 kg

1 metal carrying box for earthing set – ref.TD386  
Total weight Ffor earthing set only : about 28 Kg

1 insulating stick in 2 pieces 2 (2 x 1,5 m) with female hexagon type head  
total length 3 m - ref.PRE2300HE

1 soft carrying bag for stick – ref. H32A  
Total weight for stick 3,0 Kg

Comply to IEC 61230 and IEC 60855 international standards

### 70KV TEMPORARY GROUNDING SET FOR 3 PHASE OVERHEAD LINE SYSTEM



#### Portable earthing set for 150 KV HV – 3 phases overhead lines

Each set includes :

3 conductor clamp ref. SAP20120HE for conductor diameter 20 to 120 mm  
Max. Isc : 40 kA/1s Weight : 1,6 kg

Copper earthing cables 70 mm<sup>2</sup> - length 8 meter each – ref.TFK7008DD

3 earth clamp ref.NB33S Earth clamp for flat bars Clamping range : 33 mm  
Max. Isc : 40 kA/1s Length : 100 mm Weight : 1 kg

1 metal carrying box for earthing set – ref.TD386  
Total weight Ffor earthing set only : about 28 Kg

1 insulating stick in 2 pieces 2 (2 x 2 m) with female hexagon type head  
total length 4 m - ref.PRE2400HE

1 soft carrying bag for stick – ref. H32A  
Total weight for stick 3,0 Kg

Comply to IEC 61230 and IEC 60855 international standards

**500KV GROUNDING SET FOR 3 PHASE  
OVERHEAD LINE**



Type S1560HE Clamp for Line Conductor  
Fitted to TFK and SAFO connections



**NB33S** Earth clamp for flat bars



**Usage** : Cables designed for fitting with SAFO-type clamps

**TFK9508DD** Copper cable lead

**PRE3600HE**  
**STANDARD :**  
IEC 60855 / EN 60832



**STANDARD** : IEC61230

**USE** : For cylindrical conductors and bars

**TECHNICAL SPECIFICATIONS S1560HE**

Tightening Capacity: Ø 15 à 60 mm

Max. Short-Circuit current: 31,5kA/1s

Max. Short-Circuit current: 40kA/1s with double plate P1560S

Length. (mm): 156

Weight (kg): 1.4

**HMLT** : (bag for clamps and cable storage)

**H32** : (bag for Stick)

This document is S.F.E. property and cannot be copied or transmitted without written permit.

|                                                                                                                                                                                           |          |  |  |  |  |                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--|--|--|--|--------------------------|
| Index                                                                                                                                                                                     | 01       |  |  |  |  |                          |
| Date                                                                                                                                                                                      | 03.02.03 |  |  |  |  | Réf. Document            |
| Author                                                                                                                                                                                    | MO       |  |  |  |  |                          |
| Sibille-Fameca-Electric Co<br>RN 7 Sud – ZI les Plaines N°17 – 26780 MALATAVERNE– FRANCE<br>Tél. (+33) 475 905 800 / Fax (+33) 475 905 839 / e-mail : contact@sibille-fameca-electric.com |          |  |  |  |  | Auteur : M. O.<br>Visé : |